



BUVILL

Dear Ladies and Gentlemen, esteemed customer or soon-to-be customers,

We are happy to welcome you to our catalogue pages. Please take a moment to let us introduce ourselves and some of our products, it certainly will be worth your while.

BUDVILL Ltd., located in Munich, Germany specializes on production of high quality plastics for electrical installation.

Like many, we started small as a craftsman's establishment in 1987. The company currently is family-run in second generation.

In an effort to improve production standards and implement new ideas and yet maintain lean and efficient structures motivated investments and growth over the years.

The history of development is a history of success.

From three machines and four products, our machinery grew to a current total of 27 machines manufacturing 400 different products. Highly revered companies long have been relying on our quality and ability to supply.

Germany is one of our main markets. Our European production facilities in Hungary fulfill every EU standard and directive.

Our core competence lies in the production of high quality cable-trunkings, switch & junction-boxes and cable conduits.

Making use of our efficient intra logistics and collaborating with international logistics, we are capable of delivering within time limits at any time.

We will be happy to supply further information and look forward to your inquiry.

*Best regards,
BUDVILL GmbH*

Contact:

Office Budapest / Hungary

CEO
Tamás Bálint
tamas.balint@budvill.hu
Mobile: +36 70 318 66 60

Office Munich / Germany

Assistant to the Management
Brigitta Dagnino
brigitta.dagnino@budvill-gmbh.de
info@budvill-gmbh.de
Tel./Fax: +49(0)89 28 97 44 58
Mobile: +49(0)176-26 14 91 47

Office Friedrichsthal/Saar /Germany

Sales Management Germany
Nicolas Kartes
nicolas.kartes@budvill.de
Tel.: +49(0)6897-1716756
Mobile: +49(0)152-28716712

Instama 



SWITCH-BOXES AND JUNCTION-BOXES, FLUSH-MOUNTED
Pages 4 - 7



JUNCTION-BOXES, SURFACE-MOUNTED
Pages 7 - 9




COVERS FOR SWITCH-AND JUNCTION BOXES
Pages 9 - 11




CABLE-PASSAGE-BOXES
Page 11



CABLE TRUNKING
Pages 12 - 15

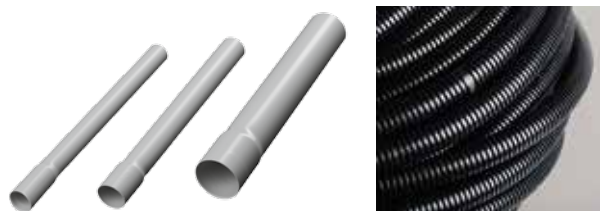

CABLE-CONDUITS
Pages 16 - 18



PLUG-IN CLAMP
Page 19



PROTECTION FOR CABLES
Page 19



Switch boxes for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 8 conduit entries up to 20mm.



**SWITCH-BOX, FLUSH-MOUNTED
Ø 60 X 40MM**

Switch box for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 8 conduit entries up to 20mm.



Item-Nr.	Order-Nr.
S1	101

Length	Width	Height	Color
60 mm	60 mm	40 mm	black
Packing Unit	Material	IP Standard	Approval
100	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
8 x / max. 20mm		≤ 650°C	



**SWITCH-BOX, FLUSH-MOUNTED
Ø 60 X 40MM - 20 PCS**

Switch box for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 8 conduit entries up to 20mm.



Item-Nr.	Order-Nr.
S1/20	102

Length	Width	Height	Color
60 mm	60 mm	40 mm	black
Packing Unit	Material	IP Standard	Approval
5	Polystyrene (PS)	IP2X	CE ÖVE
Leitungseinführung		Flammwidrig	
8 x / max. 20mm		≤ 650°C	



SWITCH-BOX, FLUSH-MOUNTED Ø 60 X 40MM - 25 PCS

Switch box for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 8 conduit entries up to 20mm.



Item-Nr.	Order-Nr.
S1/25	103

Length	Width	Height	Color
60 mm	60 mm	40 mm	black
Packing Unit	Material	IP Standard	Approval
4	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
8 x / max. 20mm		≤ 650°C	



Switch boxes for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 12 conduit entries up to 20mm.



**SWITCH-BOX, FLUSH-MOUNTED
Ø 60 X 60MM**

Switch box for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 8 conduit entries up to 20mm.



Item-Nr.	Order-Nr.
S2	104

Length	Width	Height	Color
60 mm	60 mm	60 mm	black
Packing Unit	Material	IP Standard	Approval
100	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
12 x / max. 20mm		≤ 650°C	



**SWITCH-BOX, FLUSH-MOUNTED
Ø 60 X 60MM - 20 PCS**

Switch box for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 8 conduit entries up to 20mm.



Item-Nr.	Order-Nr.
S2/20	105

Length	Width	Height	Color
60 mm	60 mm	60 mm	black
Packing Unit	Material	IP Standard	Approval
5	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
12 x / max. 20mm		≤ 650°C	



**SWITCH-BOX, FLUSH-MOUNTED
Ø 60 X 60MM - 25 PCS**

Switch box for flush-mounting installation with 4 screw domes, 2 expanding claw fields and 8 conduit entries up to 20mm.



Item-Nr.	Order-Nr.
S2/25	106

Length	Width	Height	Color
60 mm	60 mm	60 mm	black
Packing Unit	Material	IP Standard	Approval
4	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
12 x / max. 20mm		≤ 650°C	



Junction boxes for flush-mounting installation
with 9 conduit entries up to 20mm and enough space for 6 terminals 1.5 mm² or 5 terminals 2.5 mm²



**JUNCTION-BOX, FLUSH-MOUNTED
Ø 70MM**

Junction box for flush-mounting installation with 9 conduit entries up to 20mm and enough space for 6 terminals 1.5 mm² or 5 terminals 2.5 mm²



Item-Nr.	Order-Nr.
BV4	110

Length	Width	Height	Color
70 mm	70 mm	36 mm	black
Packing Unit	Material	IP Standard	Approval
100	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
9 x / max. 20mm		≤ 650°C	



**JUNCTION-BOX, FLUSH-MOUNTED
Ø 70MM - 20 PCS**

Junction box for flush-mounting installation with 9 conduit entries up to 20mm and enough space for 6 terminals 1.5 mm² or 5 terminals 2.5 mm²



Item-Nr.	Order-Nr.
BV4/20	111

Length	Width	Height	Color
70 mm	70 mm	36 mm	black
Packing Unit	Material	IP Standard	Approval
5	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
9 x / max. 20mm		≤ 650°C	



**JUNCTION-BOX, FLUSH-MOUNTED
Ø 70MM - 25 PCS**

Junction box for flush-mounting installation with 9 conduit entries up to 20mm and enough space for 6 terminals 1.5 mm² or 5 terminals 2.5 mm²



Item-Nr.	Order-Nr.
BV4/25	112

Length	Width	Height	Color
70 mm	70 mm	36 mm	black
Packing Unit	Material	IP Standard	Approval
4	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
9 x / max. 20mm		≤ 650°C	



Junction boxes for flush-mounting installation
2-gang junction boxes for flush-mounting installation with 12/20 entries up to 20/25mm.



**2-GANG JUNCTION-BOX,
FLUSH-MOUNTED**

2-gang junction box for flush-mounting installation with 12 conduit entries up to 20.



Item-Nr.	Order-Nr.
BV70/2	113

Length	Width	Height	Color
140 mm	70 mm	40 mm	black
Packing Unit	Material	IP Standard	Approval
100	Polypropylene (PP)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
12 x / max. 20mm		≤ 650°C	




**3-GANG JUNCTION-BOX,
FLUSH-MOUNTED**

3-gang junction box for flush-mounting installation with 20 conduit entries up to 25mm.



Item-Nr.	Order-Nr.
BV70/3	114

Length	Width	Height	Color
210 mm	70 mm	40 mm	black
Packing Unit	Material	IP Standard	Approval
100	Polypropylene (PP)	IP2X	CE ÖVE
Cable Insertion		Non-Flammability	
20 x / max. 25mm		≤ 650°C	

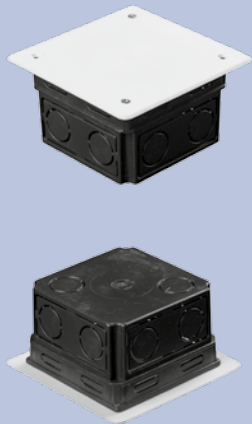

Robust junction boxes
with cover in different sizes for
flush-mounting installation.



JUNCTION-BOX, FLUSH-MOUNTED WITH COVER 80X80MM

Robust junction box with cover for flush-mounting installation.



Item-Nr.	Order-Nr.
AK1	120

Length	Width	Height	Color
80 mm	80 mm	50 mm	black / white
Packing Unit	Material	IP Standard	Approval
20	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion	Non-Flammability		
10 x / max. 20mm	≤ 650°C		



JUNCTION-BOX, FLUSH-MOUNTED WITH COVER 100X100MM

Robust junction box with cover for flush-mounting installation.



Item-Nr.	Order-Nr.
AK2	121

Length	Width	Height	Color
100 mm	100 mm	50 mm	black / white
Packing Unit	Material	IP Standard	Approval
20	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion	Non-Flammability		
14 x / max. 25mm	≤ 650°C		



JUNCTION-BOX, FLUSH-MOUNTED WITH COVER 150X150MM

Robust junction box with cover for flush-mounting installation.



Item-Nr.	Order-Nr.
AK3	122

Length	Width	Height	Color
150 mm	150 mm	60 mm	black / white
Packing Unit	Material	IP Standard	Approval
20	Polystyrene (PS)	IP2X	CE ÖVE
Cable Insertion	Non-Flammability		
14 x / max. 30mm	≤ 650°C		



Solid cavity-wall switch box
Solid cavity-wall switch boxes with
screws and entries up to 20mm.



CAVITY WALL SWITCH-BOX 65X65X45MM

Solid cavity-wall switch box with 2 screws and 4 conduit entries with up to 20mm.

Item-Nr.	Order-Nr.		
H1	200		
Length	Width	Height	Color
65 mm	65 mm	45 mm	orange
Packing Unit	Material	IP Standard	Approval
50	Polypropylene (PP)	IP3X	CE
Cable Insertion	Non-Flammability		
4x20	≤ 850°C		



CAVITY WALL SWITCH-BOX 65X65X60MM

Solid cavity-wall switch box with 2 screws and 4 conduit entries with up to 20mm.

Item-Nr.	Order-Nr.		
H2	201		
Length	Width	Height	Color
65 mm	65 mm	60 mm	orange
Packing Unit	Material	IP Standard	Approval
50	Polypropylene (PP)	IP3X	CE
Cable Insertion	Non-Flammability		
4x20	≤ 850°C		



CAVITY WALL JUNCTION-BOX 80X80X50MM

Solid cavity-wall junction box with 2 screws, 4 conduit entries with up to 20mm and 4 cable passages 3x1,5mm.

Item-Nr.	Order-Nr.		
H3	202		
Length	Width	Height	Color
80 mm	80 mm	50 mm	orange
Packing Unit	Material	IP Standard	Approval
50	Polypropylene (PP)	IP3X	CE
Cable Insertion	Non-Flammability		
4x20 + 4x1,5mm ²	≤ 850°C		



2-WAY CAVITY WALL SWITCH-BOX 135X65X45MM

Solid cavity-wall switch box with 4 screws, 6 conduit entries with up to 20mm and 6 cable passages 3x1,5mm.

Item-Nr.	Order-Nr.
H4	203

Length	Width	Height	Color
135 mm	65 mm	45 mm	orange
Packing Unit	Material	IP Standard	Approval
50	Polypropylene (PP)	IP3X	CE
Cable Insertion	Non-Flammability		
6x20 + 6x1,5mm ²	≤ 850°C		



Robust junction-box
Robust junction box. Ensures optimum installation space for different kinds of devices.



CAVITY WALL JUNCTION-BOX 100X100X45MM

Robust junction-box. Ensure optimum installation space for different kinds of devices.




Item-Nr.	Order-Nr.
GD-100	204

Length	Width	Height	Color
107 mm	107 mm	45 mm	orange
Packing Unit	Material	IP Standard	Approval
25	Polystyrene (PS)	IP3X	CE ÖVE
Cable Insertion	Non-Flammability		
4x20mm	≤ 850°C		



JUNCTION-BOX

Easy to assemble junction-boxes in different sizes with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

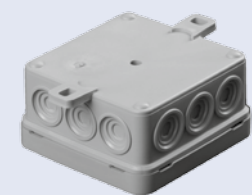

JUNCTION-BOX, SURFACE-MOUNTED, 4-POLE TERMINAL BLOCK 75X45MM

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.



Item-Nr.	Order-Nr.
A1/K	301

Length	Width	Height	Color
75 mm	45 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
40	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
8 x / max. 15mm	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED 75X45MM

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.



Item-Nr.	Order-Nr.
A1	300

Length	Width	Height	Color
75 mm	45 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
40	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
8 x / max. 15mm	≤ 650°C		




JUNCTION-BOX, SURFACE-MOUNTED 75X75MM

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.



Item-Nr.	Order-Nr.
A2	310

Length	Width	Height	Color
75 mm	75 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
40	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		

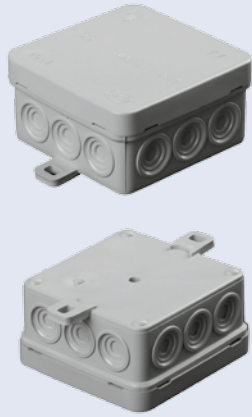

JUNCTION-BOX

Easy to assemble junction-boxes in different sizes with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.



JUNCTION-BOX, SURFACE-MOUNTED 75X75MM - 10 PCS

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

Item-Nr.	Order-Nr.
A2/10	311

Length	Width	Height	Color
75 mm	75 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
4	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED 75X75MM - 25 PCS

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

Item-Nr.	Order-Nr.
A2/25	312

Length	Width	Height	Color
75 mm	75 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
2	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED, 4-POLE TERMINAL BLOCK 75X75MM

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

Item-Nr.	Order-Nr.
A2/K	313

Length	Width	Height	Color
75 mm	75 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
40	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED 85X85MM

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

Item-Nr.	Order-Nr.
A3	320

Length	Width	Height	Color
85 mm	85 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
40	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED 85X85MM - 10 PCS

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

Item-Nr.	Order-Nr.
A3/10	321

Length	Width	Height	Color
85 mm	85 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
4	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED, 4-POLE TERMINAL BLOCK 85X85MM

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

Item-Nr.	Order-Nr.
A3/K	322

Length	Width	Height	Color
85 mm	85 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
40	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED 100X100MM

Easy to assemble junction-box with self-sealing entries for surface mounting. The grounding clips enable a subsequent correction.

Item-Nr.	Order-Nr.
A4	323

Length	Width	Height	Color
100 mm	100 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
40	(PE, PP)*	IP54	CE ÖVE
Cable Insertion	Non-Flammability		
12 x / max. 15mm	≤ 650°C		

*Polyethylene (PE) Polypropylene (PP)



JUNCTION-BOX

Compact and robust junction box with pre-assembled 4-pole terminal for surface mounting.



JUNCTION-BOX, SURFACE-MOUNTED, 4-POLE TERMINAL BLOCK 55X55MM

Compact and robust junction box with preassembled 4-pole terminal for surface mounting.



Item-Nr.	Order-Nr.
T1	330

Length	Width	Height	Color
55 mm	55 mm	25 mm	white
Packing Unit	Material	IP Standard	Approval
40	Polystyrene (PS)	IP3X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		



JUNCTION-BOX, SURFACE-MOUNTED, 4-POLE TERMINAL BLOCK 55X55MM

Compact and robust junction box with preassembled 4-pole terminal for surface mounting.



Item-Nr.	Order-Nr.
T2	331

Length	Width	Height	Color
55 mm	55 mm	25 mm	grey
Packing Unit	Material	IP Standard	Approval
40	Polystyrene (PS)	IP3X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		



Reusable signal cover

Reusable signal cover for switch and junction boxes. Enables the protection of the box interior during the plastering.



SIGNAL COVER FOR SWITCH-BOX 60MM

Reusable signal cover for switch boxes with 60mm diameter. Enables the protection of the box interior during the plastering.

Item-Nr.	Order-Nr.
P1	400

Length	Width	Height	Color
60 mm	60 mm	5 mm	red
Packing Unit	Material	IP Standard	Approval
100	Polypropylene (PP)	X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		



SIGNAL COVER FOR SWITCH-BOX 60MM - 25 PCS

Reusable signal cover for switch boxes with 60mm diameter. Enables the protection of the box interior during the plastering.

Item-Nr.	Order-Nr.
P1/25	401

Length	Width	Height	Color
60 mm	60 mm	5 mm	red
Packing Unit	Material	IP Standard	Approval
4	Polypropylene (PP)	X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		




SIGNAL COVER FOR JUNCTION-BOX 70MM

Reusable signal cover for junction boxes with 70mm diameter. Enables the protection of the box interior during the plastering.

Item-Nr.	Order-Nr.
P2	402

Length	Width	Height	Color
70 mm	70 mm	5 mm	red
Packing Unit	Material	IP Standard	Approval
100	Polypropylene (PP)	X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		

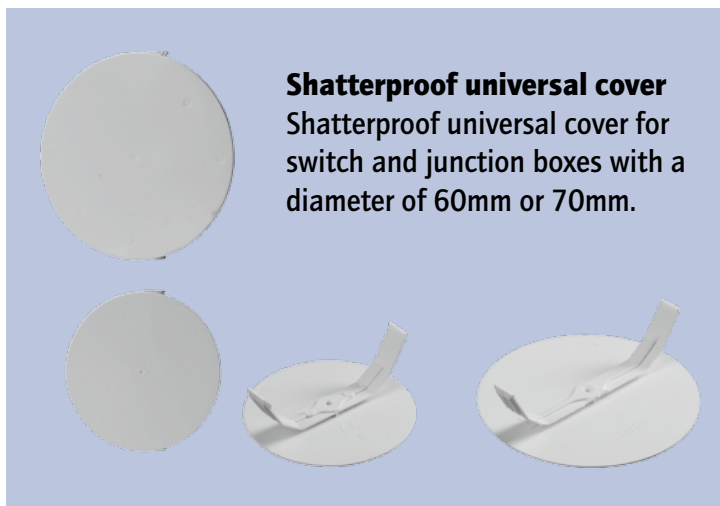

Shatterproof universal cover
Shatterproof universal cover for switch and junction boxes with a diameter of 60mm or 70mm.



SPRING COVER FOR JUNCTION-BOX 88MM

Shatterproof universal-cover for junction-boxes with a diameter of 70mm.

Item-Nr.	Order-Nr.
T30306	413

Length	Width	Height	Color
88 mm	88 mm	10 mm	white
Packing Unit	Material	IP Standard	Approval
100	Polystyrene (PS)	X	CE
Cable Insertion		Non-Flammability	
X		≤ 650°C	



SPRING COVER FOR SWITCH-BOX 68MM

Shatterproof universal-cover for switch-boxes with a diameter of 60mm.

Item-Nr.	Order-Nr.
T30305	410

Length	Width	Height	Color
68 mm	68 mm	10 mm	white
Packing Unit	Material	IP Standard	Approval
100	Polystyrene (PS)	X	CE
Cable Insertion		Non-Flammability	
X		≤ 650°C	



SPRING COVER FOR JUNCTION-BOX 88MM - 20 PCS

Shatterproof universal-cover for junction-boxes with a diameter of 70mm.

Item-Nr.	Order-Nr.
T30306/20	414

Length	Width	Height	Color
88 mm	88 mm	10 mm	white
Packing Unit	Material	IP Standard	Approval
5	Polystyrene (PS)	X	CE
Cable Insertion		Non-Flammability	
X		≤ 650°C	



SPRING COVER FOR SWITCH-BOX 68MM - 20 PCS

Shatterproof universal-cover for switch-boxes with a diameter of 60mm.

Item-Nr.	Order-Nr.
T30305/20	411

Length	Width	Height	Color
68 mm	68 mm	10 mm	white
Packing Unit	Material	IP Standard	Approval
5	Polystyrene (PS)	X	CE
Cable Insertion		Non-Flammability	
X		≤ 650°C	



SPRING COVER FOR JUNCTION-BOX 88MM - 25 PCS

Shatterproof universal-cover for junction-boxes with a diameter of 70mm.

Item-Nr.	Order-Nr.
T30306/25	415

Length	Width	Height	Color
88 mm	88 mm	10 mm	white
Packing Unit	Material	IP Standard	Approval
4	Polystyrene (PS)	X	CE
Cable Insertion		Non-Flammability	
X		≤ 650°C	



SPRING COVER FOR SWITCH-BOX 68MM - 25 PCS

Shatterproof universal-cover for switch-boxes with a diameter of 60mm.

Item-Nr.	Order-Nr.
T30305/25	412

Length	Width	Height	Color
68 mm	68 mm	10 mm	white
Packing Unit	Material	IP Standard	Approval
4	Polystyrene (PS)	X	CE
Cable Insertion		Non-Flammability	
X		≤ 650°C	

*Polyethylen (PE) Polypropylen (PP)



Cover for junction-boxes AK1, AK2 and AK3



Cover for junction-boxes 80x80mm

Item-Nr. **AK1T** Order-Nr. **420**

Length	Width	Height	Color
80 mm	80 mm	3 mm	white
Packing Unit	Material	IP Standard	Approval
10	Polystyrene (PS)	X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		



Cover for junction-boxes 100x100mm

Item-Nr. **AK2T** Order-Nr. **421**

Length	Width	Height	Color
100 mm	100 mm	3 mm	white
Packing Unit	Material	IP Standard	Approval
10	Polystyrene (PS)	X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		



Cover for junction-boxes 150x150mm

Item-Nr. **AK3T** Order-Nr. **422**

Length	Width	Height	Color
150 mm	150 mm	3 mm	white
Packing Unit	Material	IP Standard	Approval
10	Polystyrene (PS)	X	CE
Cable Insertion	Non-Flammability		
X	≤ 650°C		



CABLE PASSAGE BOX
Convenient cable feed-through box for desktop mounting.



CABLE PASSAGE BOX WHITE

Convenient cable feed-through box for desktop mounting.

Item-Nr. **KD/1** Order-Nr. **500**

Length	Width	Height	Color
67 mm	67 mm	23 mm	white
Packing Unit	Material	IP Standard	Approval
20	Polystyrene (PS)	X	CE
Cable Insertion	Non-Flammability		
13 x 20mm	X		



CABLE PASSAGE BOX BLACK

Convenient cable feed-through box for desktop mounting.

Item-Nr. **KD/2** Order-Nr. **501**

Length	Width	Height	Color
67 mm	67 mm	23 mm	black
Packing Unit	Material	IP Standard	Approval
20	Polystyrene (PS)	X	CE
Cable Insertion	Non-Flammability		
13 x 20mm	X		




CABLE PASSAGE BOX BROWN

Convenient cable feed-through box for desktop mounting.

Item-Nr. **KD/3** Order-Nr. **502**


Length	Width	Height	Color
67 mm	67 mm	23 mm	brown
Packing Unit	Material	IP Standard	Approval
20	Polystyrene (PS)	X	CE
Cable Insertion	Non-Flammability		
13 x 20mm	X		

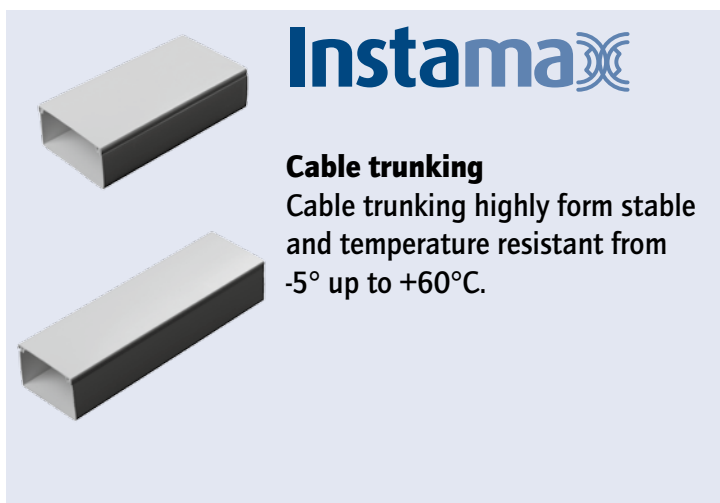

Instama

Cable trunking


Cable trunking highly form stable and temperature resistant from -5° up to +60°C.



CABLE TRUNKING WITH REMOVEABLE COVER 30X15MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.


Item-Nr.	Order-Nr.		
K2	610		
Length	Width	Height	Color
2000 mm	30 mm	15 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 15X15MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.


Item-Nr.	Order-Nr.		
K1	600		
Length	Width	Height	Color
2000 mm	15 mm	15 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 30X15MM BROWN

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.


Item-Nr.	Order-Nr.		
K2	611		
Length	Width	Height	Color
2000 mm	30 mm	15 mm	brown RAL 8014
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 15X15MM BROWN

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.


Item-Nr.	Order-Nr.		
K1	601		
Length	Width	Height	Color
2000 mm	15 mm	15 mm	brown RAL 8014
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 30X15MM GREY

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.


Item-Nr.	Order-Nr.		
K2	612		
Length	Width	Height	Color
2000 mm	30 mm	15 mm	grey RAL 7035
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 15X15MM GREY

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.		
K1	602		
Length	Width	Height	Color
2000 mm	15 mm	15 mm	grey RAL 7035
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 30X30MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.		
K3	620		
Length	Width	Height	Color
2000 mm	30 mm	30 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		

*Polyvinyl Chloride (PVC)




CABLE TRUNKING WITH REMOVEABLE COVER 30X30MM BROWN

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
K3	621

Length	Width	Height	Color
2000 mm	30 mm	30 mm	brown RAL 8014
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 30X30MM GREY

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
K3	622

Length	Width	Height	Color
2000 mm	30 mm	30 mm	grey RAL 7035
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 40X40MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
K4	630

Length	Width	Height	Color
2000 mm	40 mm	40 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 40X40MM BROWN

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
K4	631

Length	Width	Height	Color
2000 mm	40 mm	40 mm	brown RAL 8014
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 40X40MM GREY

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
K4	632

Length	Width	Height	Color
2000 mm	40 mm	40 mm	grey RAL 7035
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH GLUE STRIP 7X6MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA0706	678

Length	Width	Height	Color
2000 mm	7 mm	6 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH GLUE STRIP 9X8MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA0908	679

Length	Width	Height	Color
2000 mm	9 mm	8 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER AND GLUE STRIP 10X10 WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA1010	680

Length	Width	Height	Color
2000 mm	10 mm	10 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		

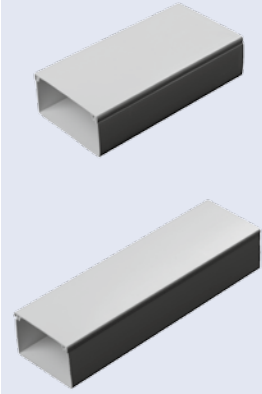

Cable trunking

Cable trunking highly form stable and temperature resistant from -5° up to +60°C.




MINI CABLE TRUNKING, WITH HINGED LID AND GLUE STRIP 12X10MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr. **INSTA1210** Order-Nr. **660**

Length	Width	Height	Color
2000 mm	12 mm	10 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 15X10MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr. **INSTA1510** Order-Nr. **682**

Length	Width	Height	Color
2000 mm	15 mm	10 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




MINI CABLE TRUNKING, WITH HINGED LID AND GLUE STRIP 16X10MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr. **INSTA1610** Order-Nr. **661**

Length	Width	Height	Color
2000 mm	16 mm	10 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 22X10MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr. **INSTA2210** Order-Nr. **670**

Length	Width	Height	Color
2000 mm	22 mm	10 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 25X17MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr. **INSTA2517** Order-Nr. **672**

Length	Width	Height	Color
2000 mm	25 mm	17 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 25X25MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr. **INSTA2525** Order-Nr. **674**

Length	Width	Height	Color
2000 mm	25 mm	25 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CABLE TRUNKING WITH REMOVEABLE COVER 30X10MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr. **INSTA3010** Order-Nr. **671**

Length	Width	Height	Color
2000 mm	30 mm	10 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		

*Polyvinyl Chloride (PVC)



CABLE TRUNKING WITH REMOVEABLE COVER 40X17MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA4017	673

Length	Width	Height	Color
2000 mm	40 mm	17 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 60X25MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA6025	676

Length	Width	Height	Color
2000 mm	60 mm	25 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 40X25MM WITH GLUE STRIP WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA4025	650

Length	Width	Height	Color
2000 mm	40 mm	25 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 100X50MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA10050	677

Length	Width	Height	Color
2000 mm	100 mm	50 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 50X25MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA5025	675

Length	Width	Height	Color
2000 mm	50 mm	25 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 110X60MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA11060	681

Length	Width	Height	Color
2000 mm	110 mm	60 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		




CABLE TRUNKING WITH REMOVEABLE COVER 60X40MM WHITE

Cable trunking with high form stability and temperature resistance from -5° up to +60°C.

Item-Nr.	Order-Nr.
INSTA6040	640

Length	Width	Height	Color
2000 mm	60 mm	40 mm	white RAL 9010
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



Cable conduit

Cable conduit with one-sided fitting for standard surface mounting, pressure resistant up to 320N/5cm and temperature resistant from -5° up to +60°C.



CABLE CONDUIT Ø16 - 320N/5 CM (2M)

Cable conduit with one-sided fitting for standard surface mounting, pressure resistant up to 320N/5cm and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
KR1	700

Length	Width	Height	Color
2000 mm	16 mm	16 mm	grey
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion		Non-Flammability	
X		Flame retardant, Self-extinguishing	



CABLE CONDUIT Ø20 - 320N/5 CM (2M)

Cable conduit with one-sided fitting for standard surface mounting, pressure resistant up to 320N/5cm and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
KR2	701

Length	Width	Height	Color
2000 mm	20 mm	20 mm	grey
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion		Non-Flammability	
X		Flame retardant, Self-extinguishing	



CABLE CONDUIT Ø25 - 320N/5 CM (2M)

Cable conduit with one-sided fitting for standard surface mounting, pressure resistant up to 320N/5cm and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
KR3	702

Length	Width	Height	Color
2000 mm	25 mm	25 mm	grey
Packing Unit	Material	IP Standard	Approval
20	(PVC)*	X	CE ÖVE
Cable Insertion		Non-Flammability	
X		Flame retardant, Self-extinguishing	



CABLE CONDUIT Ø32 - 320N/5 CM (2M)

Cable conduit with one-sided fitting for standard surface mounting, pressure resistant up to 320N/5cm and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
KR4	703

Length	Width	Height	Color
2000 mm	32 mm	32 mm	grey
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion		Non-Flammability	
X		Flame retardant, Self-extinguishing	



CABLE CONDUIT Ø40 - 320N/5 CM (2M)

Cable conduit with one-sided fitting for standard surface mounting, pressure resistant up to 320N/5cm and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
KR5	704

Length	Width	Height	Color
2000 mm	40 mm	40 mm	grey
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion		Non-Flammability	
X		Flame retardant, Self-extinguishing	



CABLE CONDUIT Ø50 - 320N/5 CM (2M)

Cable conduit with one-sided fitting for standard surface mounting, pressure resistant up to 320N/5cm and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
KR6	705

Length	Width	Height	Color
2000 mm	50 mm	50 mm	grey
Packing Unit	Material	IP Standard	Approval
10	(PVC)*	X	CE ÖVE
Cable Insertion		Non-Flammability	
X		Flame retardant, Self-extinguishing	

*Polyvinyl Chloride (PVC)



Flexible conduit

Flexible conduit with lower or middle pressure and impact resistance. Temperature resistant from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 2221 for 320N and 3321 for 750N.



CORRUGATED CONDUIT Ø16 - 320N, 50M

Flexible conduit with lower pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 2221.

Item-Nr.	Order-Nr.
IR16-320/50	730

Length	Width	Height	Color
50000 mm	16 mm	16 mm	grey
Packing Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	SFlame retardant, Self-extinguishing		



CORRUGATED CONDUIT Ø20 - 320N, 50M

Flexible conduit with lower pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 2221.

Item-Nr.	Order-Nr.
IR20-320/50	731

Length	Width	Height	Color
50000 mm	20 mm	20 mm	grey
VPacking Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CORRUGATED CONDUIT Ø25 - 320N, 50M

Flexible conduit with lower pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 2221.

Item-Nr.	Order-Nr.
IR25-320/50	732

Length	Width	Height	Color
50000 mm	25 mm	25 mm	grey
Packing Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CORRUGATED CONDUIT Ø32 - 320N, 50M

Flexible conduit with lower pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 2221.

Item-Nr.	Order-Nr.
IR32-320/50	733

Length	Width	Height	Color
50000 mm	32 mm	32 mm	grey
Packing Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CORRUGATED CONDUIT Ø16 - 750N, 50M

Flexible conduit with middle pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 3321.

Item-Nr.	Order-Nr.
IR16-750/50	740

Length	Width	Height	Color
50000 mm	16 mm	16 mm	black
Packing Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CORRUGATED CONDUIT Ø20 - 750N, 50M

Flexible conduit with middle pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 3321.

Item-Nr.	Order-Nr.
IR20-750/50	741

Length	Width	Height	Color
50000 mm	20 mm	20 mm	black
Packing Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



CORRUGATED CONDUIT Ø25 - 750N, 50M

Flexible conduit with middle pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 3321.

Item-Nr.	Order-Nr.
IR25-750/50	742

Length	Width	Height	Color
50000 mm	25 mm	25 mm	black
Packing Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



Flexible conduit

Flexible conduit with lower or middle pressure and impact resistance. Temperature resistant from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 2221 for 320N and 3321 for 750N.



CORRUGATED CONDUIT Ø32 - 750N, 50M

Flexible conduit with middle pressure and impact resistance and a temperature resistance from -5° up to +60°C. Enables a surface-, flush- and cavity-wall mounting. Classification code 3321.

Item-Nr.	Order-Nr.
IR32-750/50	743

Length	Width	Height	Color
50000 mm	32 mm	32 mm	black
Packing Unit	Material	IP Standard	Approval
1	(PVC)*	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



Flexible conduit

Concrete strength, flexible and halogen-free conduit with sleek surface inside and outside, pressure resistant up to 750N and temperature resistant from -5° up to +60°C.



BETONFLEX CABLE CONDUIT Ø25, 100M

Concrete strength, flexible and halogen-free conduit with sleek surface inside and outside, pressure resistant up to 750N and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
BF25/100	712

Length	Width	Height	Color
100000 mm	25 mm	25 mm	orange
Packing Unit	Material	IP Standard	Approval
1	Polyethylene (PE)	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	X		



BETONFLEX CABLE CONDUIT Ø16, 100M

Concrete strength, flexible and halogen-free conduit with sleek surface inside and outside, pressure resistant up to 750N and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
BF16/100	710

Length	Width	Height	Color
100000 mm	16 mm	16 mm	orange
Packing Unit	Material	IP Standard	Approval
1	Polyethylene (PE)	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	X		



BETONFLEX CABLE CONDUIT Ø32, 100M

Concrete strength, flexible and halogen-free conduit with sleek surface inside and outside, pressure resistant up to 750N and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
BF32/50	713

Length	Width	Height	Color
50000 mm	32 mm	32 mm	orange
Packing Unit	Material	IP Standard	Approval
1	Polyethylene (PE)	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	X		



BETONFLEX CABLE CONDUIT Ø20, 100M

Concrete strength, flexible and halogen-free conduit with sleek surface inside and outside, pressure resistant up to 750N and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
BF20/100	711

Length	Width	Height	Color
100000 mm	20 mm	20 mm	orange
Packing Unit	Material	IP Standard	Approval
1	Polyethylene (PE)	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	X		




BETONFLEX CABLE CONDUIT Ø40, 100M

Concrete strength, flexible and halogen-free conduit with sleek surface inside and outside, pressure resistant up to 750N and temperature resistant from -5° up to +60°C.

Item-Nr.	Order-Nr.
BF40/50	714

Length	Width	Height	Color
50000 mm	40 mm	40 mm	orange
Packing Unit	Material	IP Standard	Approval
1	Polyethylene (PE)	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	X		

*Polyvinyl Chloride (PVC)



Fast-on clip

Fast-on clip for easy and quick conduit mount on wall and ceiling. Simply stick onto on drillhole, no need for additional screws and anchors.



PLUG-IN CLAMP 7-12MM, WHITE

Fast-on clip for easy and quick conduit mount on wall and ceiling. Simply stick onto on drillhole, no need for additional screws and anchors.

Item-Nr.	Order-Nr.
SE/1	800

Length	Width	Height	Color
x	x	x	white
Packing Unit	Material	IP Standard	Approval
20	Polyamide (PA)	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



PLUG-IN CLAMP 7-12MM, GREY

Fast-on clip for easy and quick conduit mount on wall and ceiling. Simply stick onto on drillhole, no need for additional screws and anchors.

Item-Nr.	Order-Nr.
SE/2	801

Length	Width	Height	Color
x	x	x	grey
Packing Unit	Material	IP Standard	Approval
20	Polyamide (PA)	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



PLUG-IN CLAMP 7-12MM, GREY

Fast-on clip for easy and quick conduit mount on wall and ceiling. Simply stick onto on drillhole, no need for additional screws and anchors.

Item-Nr.	Order-Nr.
SE/3	802

Length	Width	Height	Color
x	x	x	grey
Packing Unit	Material	IP Standard	Approval
20	Polyamide (PA)	X	CE
Cable Insertion	Non-Flammability		
X	Flame retardant, Self-extinguishing		



Mechanical protection

Mechanical protecton for mounted grounding cables. Distinct yellow or red color for additional caution effect



UNDERGROUND CABLE COVER

Mechanical protection for mounted grounding cables. Distinct yellow color for additional caution effect

Item-Nr.	Order-Nr.
KP01	900

Length	Width	Height	Color
1000	250	2	red
Packing Unit	Material	IP Standard	Approval
10	(PVC) oder (PE)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	X		



UNDERGROUND CABLE COVER

Mechanical protection for mounted grounding cables. Distinct yellow color for additional caution effect

Item-Nr.	Order-Nr.
KP01/2	901

Length	Width	Height	Color
1000	250	2	yellow
Packing Unit	Material	IP Standard	Approval
10	(PVC) oder (PE)*	X	CE ÖVE
Cable Insertion	Non-Flammability		
X	X		

*Polyvinyl Chloride (PVC) or Polyethylene (PE)



BUDVILL GmbH

Boschetsrieder Straße 132
81379 Munich / Germany
Tel./Fax: +49(0) 892897 4458

VAT-No.: DE259391876
Tax Ident. No.: 143/122/40778
Commercial Register: HRB 171938, Munich
D-U-N-S No.: 312693008
GLN: GLN: 42 6046094 000 1

Bank details:
Bank: Commerzbank
Bank code: 760 800 00
BIC: DRESDE FF 760
IBAN: DE17 7008 0000 0410 0268 00